

# MODEL K-440

## Servomotor-equipped machine Heat roll type

### ◆ Features

- Panel with product memory function carried, easy change of pouch length by touch panel operation.
- The servomotor used for the operation enables easy alignment of change of the pouch length with simple.
- Cutter unit set in 1 notch blade, perforation blade (patent pending), cut position matching and slanted cut adjustment is easy.
- Compact

### ◆ Standard equipment


- Print registration system
- Heat disconnection detector
- Safety cover
- Film tensioned
- Film end detector
- Chute knocker

### ◆ Optional equipment

- Opening notch cutting unit (single notch)
- Code printer (Hot printer)
- Perforator and multiple cutter
- Serrated cutter
- Discharge conveyor
- 4-side sealing unit

### ◆ Main specification

Major applications	Powder · Granule · Grain, Medicine, Chemical etc.
Sealing style	Three-side seal (possible 4side-seal by optional equipment)
Packing speed	Max 120 pouches/min
Film material	Laminated film etc.
Pouch size	Width 30mm ~ 80mm Length 60mm ~ 110mm
Machine dimensions	Width 695mm × Depth 730mm × Height 1750mm
Machine weight	Approx. 400Kg
Power consumption	200V, 3-phase, Approx. 1.5Kw

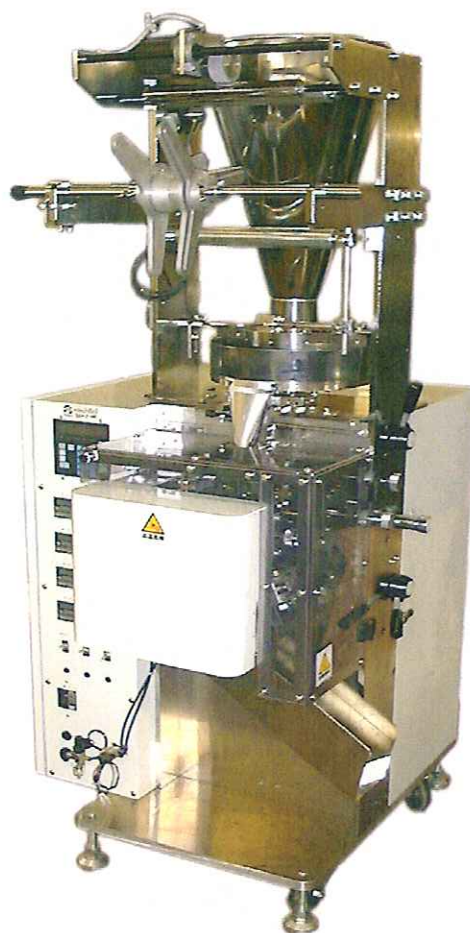

**TOPACK CO.,LTD.**

15-10, Kamihigashi 6-chome Hirano-ku, Osaka 547-0002, Japan

Phone:81-6-6792-7341 Fax:81-6-6794-3074

E-mail: [sales@topack.co.jp](mailto:sales@topack.co.jp)

URL: <http://www.topack.co.jp/>